Journal of Skin Health and Cosmetics

Research Article Open Access

Effects of Temperature Treatments on Hair Curl Reversion and Damage

Abbasi A. Gandhi^{*}, Stephanie Kipling, Liam Wright, and Steven G Latham

GHD (Jemella Group Ltd.), Cambridge, CB21 6AD, United Kingdom

*Corresponding author: Abbasi A.Gandhi, GHD (Jemella Group Ltd.), Cambridge, CB21 6AD, United Kingdom, Tel: +44 (0) 1223 824 346; Email: a.gandhi@ghdhair.com

Received: Mar 08 2024, Accepted: Apr 12 2024; Published: Apr 25, 2024, DOI: 10.59462/jishc.1.1.103

Citation: Gandhi AA, Kipling S, Wright L, Latham SG (2024) Effects of Temperature Treatments on Hair Curl Reversion and Damage. Journal of Skin Health and Cosmetics,1(1):103

Copyright: © 2024 Gandhi AA, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Abstract

Background and objective: Consumers following the Natural hair movement want to style their hair without thermal damage concerns. When women used a hotter styler, their hair could not revert back to its natural pattern after wetting and they expressed anxiety about heat damage. This study supports these observations using objective measurements of reversion and damage after heat treatment.

Methods: Curly tresses were straightened fifty times at 185°C or 220°C. Reversion was compared between treatments and to natural variation after immersion in water. The damage was explored using differential scanning calorimetry and tensile testing.

Results: The treatment at 220°C causes a significant shift to less curly types indicating that the fibres were unable to revert back to their original curl pattern. The DSC and tensile results suggest that the cortex structure has been damaged and the fibres have become less stiff and break more easily after the treatment at 220°C but not at 185°C.

Conclusions: The structural damage at 220°C suggests that the shape memory effect cannot be triggered adequately by the presence of water and the fibres cannot return to their natural curl state.

Introduction

In-house surveys have revealed that many consumers desire hair styling tools that provide quicker styling with longer-lasting results and reduced damage compared to their current styling regime. Ue followers of the Natural hair movements [1] have two main desires: 1) reduction of thermo-mechanical damage and 2) reversion of natural curls aler heat styling. Several studies have investigated the physical, structural and thermo-mechanical properties of curly and Afrotextured hair types [2-10].

Our internal study suggested that when consumers are allowed to vary the plate temperature of their styler 73% increase it above the 'medium' setting and 31% use the 'high' setting. As manufacturers have responded to pressures of the marketplace, operating temperatures have increased to ~230°C, which enters the range of keratin denaturation and pyrolysis of dry hair [11-14]. It is generally believed that increasing the plate temperature of a styler results in improved styling performance [15,16]. However heat treatments at high temperatures induce extensive damage to morphological components of human hair [17-21]. A recent study investigated the e9ects on damage indicators when styling with temperatures above 185°C [22], close to where the denaturation process of the microfibrils starts [23]. Hair breakage due to thermo-mechanical damage is primary concern for consumers wanting to heat style their hair [24].

Progressive hair straightening using heat [25] has been investigated as has water induced reversion in animal hair [26], but to the authors' knowledge no studies have examined reversion of curly hair aler heat treatment. In a small-scale internal study, women with a range of curly

hair types tested a styler operating at 185°C. Uey reported that their hair reverted to its natural curl pattern successfully aler wetting with no signs of damage. When using a hotter styler, they reported loss of reversion.

In this study the degree to which reversion occurs aler heat treatment at di9erent temperatures is explored. Ue degree of internal structural damage was determined using di9erential scanning calorimetry (DSC) and tensile testing.

Materials and Methods

Reversion

Curly hair (Afro-textured) from six individual heads was purchased from International Hair Importers & Products (each tress: ~2 gm weight). Stylers with a plate temperature of 185°C and 220°C were used. Two tresses from each head were used per treatment.

Ue tresses were subjected to an initial wash and dried overnight in a constant 23°C and 50% RH environment. 30 fibres from four places on each tress were selected. Ue fibres were extended, and a 6 cm length cut from each fibre. Uese were placed in deionised water for five minutes then removed and returned to the constant environment overnight to dry and revert to as close to their natural curl pattern as possible. Ue curl type of each fibre was identified using the L'Oréal method [27,28]. Uis method yields a scale of eight curl types; Type I, lowest through to Type VIII, highest, level of curl.

Ue tresses were then treated 50 times at either 185°C or 220°C using an automated rig to ensure the force between the plates was 4 \pm 1N and the pull rate was 20 mm/s. Ue tresses were rotated by 90° between passes. Aler treatment another 30 fibres were removed from each tress and the reversion and classification processes were repeated.

Damage

For both DSC and tensile testing 2.1 g, dark curly tresses 175 mm long were purchased from Hugo Royer International Ltd (Sandhurst, Berkshire, UK). Ue tresses underwent a wash before testing commenced and were heat treated as previously described. Two tresses were used per temperature.

A Perkin Elmer DSC-6000 system (Perkin Elmer, Seer Green, Buckinghamshire, UK) was used for denaturation temperature and enthalpy measurement [14]. Ue fibres were chopped into small (< 2 mm) sections and 6 \pm 1 mg of snippets was placed in a sealed aluminium sample pan with 50 μl deionised water. Samples were heated at a rate of 10°C/min between $30^{\circ} \text{C-} 200^{\circ} \text{C}$. Two samples were prepared per tress.

For tensile testing 50 fibres were selected from each tress. Fibre diameters were measured using a Dia-Stron FDAS 770 fibre dimensional analysis system (Dia-Stron Ltd., Andover, Hampshire, UK). Ue tensile apparatus, a Dia-Stron MTT175, applied a stress to the fibres until breakage under controlled conditions of 23°C and 50% RH. Elastic modulus and break stress for each treatment were averaged over the values obtained from both tresses.

Results and Discussion

Ue number of fibres of each curl type was counted before and aler heat treatment to gauge the e9ect of the heat treatment. Before heat treatment the fibres were Types V, VI and VII.




Figure 1: Curl type before and aler heat treatment with a 185° C styler. Ue asterisk indicates a statistically significant di9erence (p<0.05).

Ue graph in (Figure 1) shows the number of fibres of each type before and aler 50 passes using a styler with a plate temperature of 185°C. Uere is no statistically significant change in Type V and Type VI fibres; however, there is a small increase in Type VII fibres. Uis may have arisen due to bias in the fibre selection process. True randomness with no bias would require as many place choices as there

are fibres in the tress which is impractical. In this experiment, the bias is reduced by choosing each group of fibres from four places on the tress instead of one.

Ue e9ect of using a styler with a plate temperature of 220°C can be seen in the graph in (Figure 2). Ue heat treatment causes statistically significant decreases in Type VI and VII fibres and a statistically significant increase in Type V and IV fibres. Uere is a shil towards Type V and lower curl types, with some Type III and IV fibres observed. Uis shil to less curly types indicates that the fibres were unable to revert back to their original curl pattern.




Figure 2: Curl type before and aler heat treatment with a 220°C styler. Ue asterisk indicates a statistically significant di9erence (p<0.05).

Uere is variation in the tresses used in this study. Uis is shown as the shaded region in the graph in (Figure 3). Ue natural variation was calculated as the proportional di9erence between the fibres of tresses from the same head before treatment. Uis was then averaged across all heads.

Ue percentage of fibres that changed aler heat treatment is shown in (Figure 3). Ue increase in curliness of 9.2 \pm 4.1% when using a styler at 185°C is smaller than the natural variation of the hair at 17.0 \pm 2.8%. Ue natural variation means that if one was to select two random samples from the tress, an apparent increase or decrease of up to 20% could be observed without carrying out any heat treatment. Hence any change in curl type below 20% is indistinguishable from natural variation. Due to the inability of the fibres treated at 220°C to revert to their natural curl pattern, 37.5 \pm 4.4% of fibres changed towards less curly types. Uis change is larger than the natural variation, and so can be attributed to the heat treatment.

In addition to investigating at the level of individual fibres, the ability of a tress to return to its natural curl pattern was determined. All of the tresses straightened at 185°C displayed no statistically significant di9erence aler heat treatment. However, only 25% of the tresses straightened at 220°C showed no statistically significant di9erence. Uis supports the fibre results as most tresses heat treated at 220°C were unable to revert successfully.

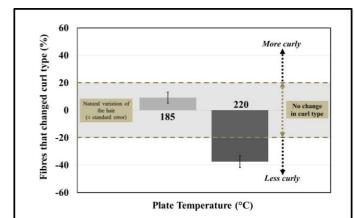


Figure 3: Comparing shil in curl type due to heat treatment with natural variation of hair. Error bars represent standard error.

(Figures 4 and 5) show denaturation temperature and enthalpy respectively for both before and aler the two heat treatments. A previous study concluded that the endothermic e9ect occurs due to events within the cortex [29]. Ue denaturation temperature is associated with viscosity of the IFAP (intermediate filament associated proteins, the matrix phase) [13,30]. Whereas the denaturation enthalpy is related to denaturing of IF (intermediate filaments, the crystalline phase) and breaking of the IFAP-IF interface [29,31,32]. If the thermal treatment causes internal damage, the denaturation temperature/ enthalpy aler treatment will be statistically significantly lower than that before treatment. Ue results in Figure 4 show that the denaturation temperature for the treatment with the 220°C styler, 146.3 \pm 0.9°C is significantly lower than the control at 157.9 \pm 0.5°C. However, the treatment at 185°C produced no significant di9erence to the control. Ue same is true for the denaturation enthalpy. Ue treatment at 220°C gives a corresponding value of 4.77 ± 0.03 J/g and is significantly smaller than the value of the control (12.68 \pm 0.36 J/g). For the 185°C heat treatment there is no significant di9erence between control and treatment. Ue DSC results shown in Figures 4 and 5 suggest that the internal structure of the hair has been damaged during the treatment at 220°C but not when treated at 185°C. Further, the treatment at 220°C induces three alterations: 1) changes the matrix (IFAP) viscosity leading to more freedom of movement, 2) breaks IFAP-IF interface bonds, likely to be disulphide bonds and 3) breaks αkeratin backbone/branches leading to disintegration of the IF structure. Ue proposed structural model for the water-sensitive shape memory mechanism of animal hair [26] suggests that internal structural alterations would hinder the recovery of the fibre's innate shape aler wetting and drying. Uese three alterations explain our reversion results on fibres treated at 220°C. Ue tensile parameters of break stress and elastic modulus are shown in (Figures 6 and 7). Uere is a significant decrease in break stress and elastic modulus compared to the control tresses for the fibres treated at 220°C. However there is no statistically significant decrease in either parameter for fibres treated at 185°C. Ue results on break stress and elastic modulus infer damage from the 220°C but not from the 185°C treatment. Ue change in elastic modulus shows that the highest temperature treatment has produced fibres that are less sti9 and break more easily. Ue DSC results suggest this is caused by loss of integrity of the molecular structure such that there are fewer bonds in the molecular framework. In terms of the water-sensitive shape memory model this loss of

structure means that the shape memory e9ect cannot be activated to the same extent by the presence of water and therefore the fibre cannot return to its former shape.




Figure 4: Ue denaturation temperature before and aler heat treatments. Ue asterisk indicates a statistically significant di9erence (p<0.05). Error bars represent standard error.




Figure 5: Ue denaturation enthalpy before and aler heat treatments. Ue asterisk indicates a statistically significant di9erence (p<0.05). Error bars represent standard error.




Figure 6: Comparing elastic modulus aler heat treatment with control (before heat treatment). Error bars represent standard error.

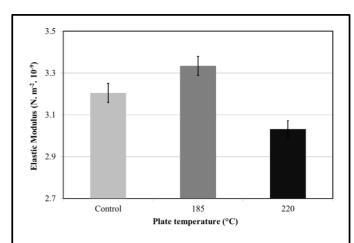


Figure 7: Comparing break stress aler heat treatment with control (before heat treatment). Error bars represent standard error.

Conclusion

Ue data reported here shows that aler straightening curly hair tresses using a styler at 185°C, the hair's ability to revert to its natural curl pattern is una9ected. However, when using a styler at 220°C the hair tresses show a reduction in reversion and shil to lower curl types. It is suggested that the structural damage, lower sti9ness and tendency to break at lower stress levels induced in hair treated at 220°C, inferred by a reduction in denaturation parameters and a change in elastic modulus and break stress, is the cause of the inability of the fibres to revert successfully. Uere is no change in the denaturation parameters or in the elastic modulus and break stress aler treatment at 185°C and hence the fibres revert successfully.

References

- Hahn J, Dandridge T, Seshadri P, Marconnet A, Reid T (2015) Integrating designmethodology, thermal sciences and customer needs to address challenges in the hair care industry. ASME Proceedings 7: 46551-46561.
- Bryant H, Porter C, Yang G (2012) Curly hair: measured di9erences and contribution to breakage. Int J Dermatol 51: 8-11.
- Porter CE, Dixon F, Khine CC, Pistorio B, Bryant H, et al. (2009) Ue behaviour of hair from di9erent countries. J Cosmet Sci 60: 97-109.
- Syed AN, Kuhajda A, Ayoub H, Ahmed K (1995) African-American hairits physical properties and di9erences relative to Caucasian hair. Cosmet & Toiletries Mag 110: 39-48.
- 5. Kamath YK, Hornby S, Weigmann HD (1984) Mechanical and fractographic behavior of Negroid hair. J Soc Cosmet Chem 35: 21-43.
- Menkart J, Wolfram LJ, Mao I (1966) Caucassian hair, Negro hair, and wool: similarities and di9erences. J Soc Cosmet Chem 17: 769-787.
- Porter CE, Diridollou S, Barbosa VH (2005) Ue influence of African-American hair's curl pattern on its mechanical properties. Int J Dermatol 44: 4-5.
- 8. Epps JA, Wolfram LJ (1983) Combing di9erences between Caucasian and Black hair. J Soc Cosmet Chem 34: 213-214.

- Mc Michael AJ (2007) Hair breakage in normal and weathered hair: focus on the Black patient. J Investig Dermatol Symp Proc 12: 6-9.
- Wolfram ☐ (2003) Humain hair: a unique physicochemical composite. J Am Acad Dermatol 48: 106-114.
- Spei M, Holzem R (1989) Uermoanalytical determination of the relative helix content of keratins. Colloid & polym Sci 267: 549-551.
- 12. Monteiro VF, Maciel AP, Longo E (2005) Uermal analysis of Caucasian human hair. J Uerm Anal Calorim 79: 289-293.
- Christian P, Winsey N, Whatmough M, Cornwell PA (2011) Ue e9ects of water on hair-styling damage. J Cosmet Sci 62: 15-27.
- 14. Wortmann FJ, Wortmann G, Marsh J, Meinert K (2012) Uermal denaturation and structural changes of α -helical proteins in keratins. J Struct Biol 177: 553-560.
- Harper D, Qi JC, Kaplan P (2011) Uermal styling: Efficacy, convenience, damage tradeo9s. J Cosmet Sci 62: 139-147.
- 16. Evans TA (2015) Beating the Damaging E9ects of Heat on Hair. Cosmet & Toiletries 130: 28-33.
- 17. Gamez-Garcia M (1998) Ue cracking of human hair cuticles by cyclical thermal stresses. J Cosmet Sci 49: 141-153.
- 18. Lee YL, Kim YD, Hyun HJ, Pi LQ, Jin X, et al. (2011) Hair shal damage from heat and drying time of hair dryer. Ann Dermatol 23: 455-462.
- 19. McMullen R, Jachowicz J (1998) Uermal degradation of hair. I. e9ect of curling irons. J Cosmet Sci 49: 223-244.
- Nogueira AC, Scanavez C, Carnelo C, Gaspari A, Joeken I (2004) Hair color changes caused by dyeing and thermal treatments. J Cosmet Sci 55: 437-447.
- Gamez-Garcia M (2011) Void and pore formation inside the hair cortex by a denaturation and super-contraction process occurring during hair setting with hot irons. J Cosmet Sci 62: 109-210.
- 22. Wright LH, Brown CS, Cockcrol S, Gandhi AA, Diaz AF, et al. (2015) Identifying the optimum temperature range for using a styler on human hair. 19th International Hair Science Symposium, Trier, Germany.
- 23. Marzec E (1998) Ue influence of hydration and ionizing radiation on denaturation process in keratin. Bioelectroch Bioener 46: 279-284.
- 24. Davis SA (2001) Ue science of black hair: A comprehensive guide to textured hair care. Saja Publishing Company, Texas, USA.
- Dussaud A, Rana B, Lam HT (2013) Progressive hair straightening using an automated flat iron: function of silicones. J Cosmet Sci 64: 119-131.
- Xiao X, Jinlian H (2016) Animal hairs as water-stimulated shape memory materials: mechanism and structural networks in molecular assemblies. Sci Rep 6: 26393.
- de la Mettrie R, Saint-Léger D, Loussouarn G, Garcel A, Porter C, et al. (2007) Shape variability and classification of human hair: a worldwide approach. Hum Biol 79: 265-281.
- Loussouarn G, Garcel AL, Lozano I, Collaudin C, Porter C, et al. (2007)
 Worldwide diversity of hair curliness: a new method of assessment. Int J
 Dermatol 46: 2-6.
- Popescu C, Gummer C (2016) DSC of human hair: a tool for claim support or incorrect data analysis?. Int J Cosmet Sci 38: 433-439.
- Wortmann FJ, Deutz H (1993) Characterizing keratins using highpressure di9erential scanning calorimetry (HPDSC). J App Pol Sci 48: 137-150.
- Istrate D, Popescu C, Rafik ME, Möller M (2013) Ue e9ect of pH on the thermal stability of fibrous hard alpha-keratins. Polym Degrad Stab 98: 542-549.
- 32. Istrate D, Popescu C, Möller M (2009) Ue e9ect of pH on the thermal stability of fibrous hard alpha-keratins. Macromol Biosci 9: 805-812.